



MINIWEB

Ideal for Small Apparel Labels

SMARTRAC MINIWEB inlays and tags are designed especially for apparel and supply-chain applications, and feature excellent performance and superior close coupling.

MINIWEB inlays and tags have a compact 50 mm / 2 inch form factor, which can be easily converted into small-sized hangtags and other apparel labels, and are produced in dry, wet and paper tag delivery formats. They are available with the Impinj Monza R6 chip and R6-P chips that come with an Autotune feature, which helps the MINIWEB product to work at peak efficiency, even in rapidly changing environments. MINIWEB with the Monza R6 chip offers unique TID and enables pre-serialized EPC. Inlays with Monza R6-P offer additional features such as add-on user memory and on-demand memory configuration as well as a kill function and easy access control to change tag information for store data, if required.

MINIWEB with the Impinj Monza R6 and R6-P IC, used in retail applications, is included on the approved inlay list for boxed electronics by the ARC (Auburn Radio Compliance Center). MINIWEB ETSI complies with category K.

MINIWEB FCC complies with categories A, B, D, G, M, Q. Furthermore, it meets GS1 Tagged-Item Performance Protocol (TIPP) Tagged-Item Gradings M10B, S15B and M15B, S15B for the retail supply chain, retailers and suppliers.

SMARTRAC's inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, especially in the retail environment.

Overview

Operating Frequency 860 - 960 MHz (ETSI & FCC)

Integrated Circuit (IC) Impinj Monza R6 & R6-P

Antenna Size

42 × 16 mm (1.7 × 0.6 in) **Die-cut Size** 45 × 18 mm (1.8 × 0.7 in)

International Standards

EPC Class 1 Gen 2 ISO 18000-6C

Application Areas

Brand Protection

Retail




MINIWEB

Ideal for Small Apparel Labels

Technical Features			
IC + Memory	Size	Format*	Sales Code
Impinj Monza R6	42×16 mm / 1.7×0.6 in	Inlay	3004491 (ETSI)
96 bit	45×18 mm / 1.8 \times 0.7 in	Wet	3005084 (ETSI)
	45×18 mm / 1.8 \times 0.7 in	Paper Tag	3003296 (ETSI)
	42×16 mm / 1.7×0.6 in	Inlay	3004855 (FCC)
	45×18 mm / 1.8 \times 0.7 in	Wet	3005229 (FCC)
	$45 \times 18 \text{ mm} / 1.8 \times 0.7 \text{ in}$	Paper Tag	3004859 (FCC)
Impinj Monza R6-P	42 × 16 mm / 1.7 × 0.6 in	Inlay	3005078 (ETSI)
, ,	$45 \times 18 \text{ mm} / 1.8 \times 0.7 \text{ in}$	5	3005074 (ETSI)
	$45 \times 18 \text{ mm} / 1.8 \times 0.7 \text{ in}$		3005075 (ETSI)
	42×16 mm / 1.7×0.6 in	1 0	3005079 (FCC)
	45×18 mm / 1.8 × 0.7 in	5	3005081 (FCC)
	45×18 mm / 1.8 \times 0.7 in	Paper Tag	3005082 (FCC)
Web Width	48 mm / 1.9 in		
Operating Temperature	-40 °C to +85 °C / -40 °F to +185 °F		
Adhesive	Acrylic, water borne adhesive		
Core Size	76 mm / 3 in		
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing		



Orientation Sensitivity

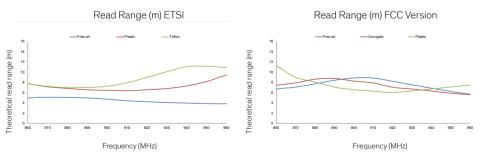

All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

SMARTRAC N.V. · Strawinskylaan 851 · 1077 XX Amsterdam · The Netherlands

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155

Contact: Sales & Customer Service

www.smartrac-group.com/contact

HALOGEN-FREE HALOGEN-FREE EIC 61240-221

© 2018 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. info@smartrac-group.com

Inlays and Tags